


### Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- High Current Capability
- Low Power Loss, High Efficiency
- High Surge Current Capability
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

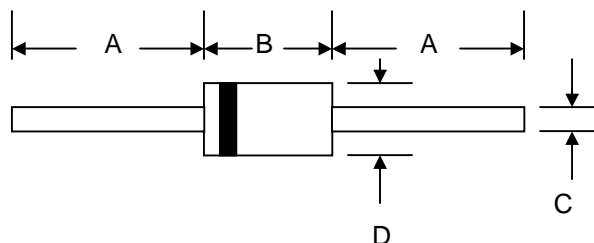

### Mechanical Data

- Case: DO-201AD, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.2 grams (approx.)
- Mounting Position: Any
- Marking: Type Number
- **Lead Free: For RoHS / Lead Free Version, Add “-LF” Suffix to Part Number, See Page 4**





DO-201AD		
Dim	Min	Max
A	25.4	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @T<sub>A</sub>=25°C unless otherwise specified


Single Phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SD1030	SD1035	SD1040	SD1045	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	30	35	40	45	V
Working Peak Reverse Voltage	V <sub>RWM</sub>					
DC Blocking Voltage	V <sub>R</sub>					
RMS Reverse Voltage	V <sub>R(RMS)</sub>	21	25	28	32	V
Average Rectified Output Current @T <sub>L</sub> = 100°C (Note 1)	I <sub>O</sub>	10				A
Non-Repetitive Peak Forward Surge Current 10ms Single sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	340				A
Forward Voltage @I <sub>F</sub> = 10A	V <sub>FM</sub>	0.55				V
Peak Reverse Current @T <sub>A</sub> = 25°C At Rated DC Blocking Voltage @T <sub>A</sub> = 125°C	I <sub>RM</sub>	0.8 70				mA
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	900				pF
Typical Thermal Resistance (Note 1)	R <sub>θJL</sub>	8.0				°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +150				°C

Note: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.  
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

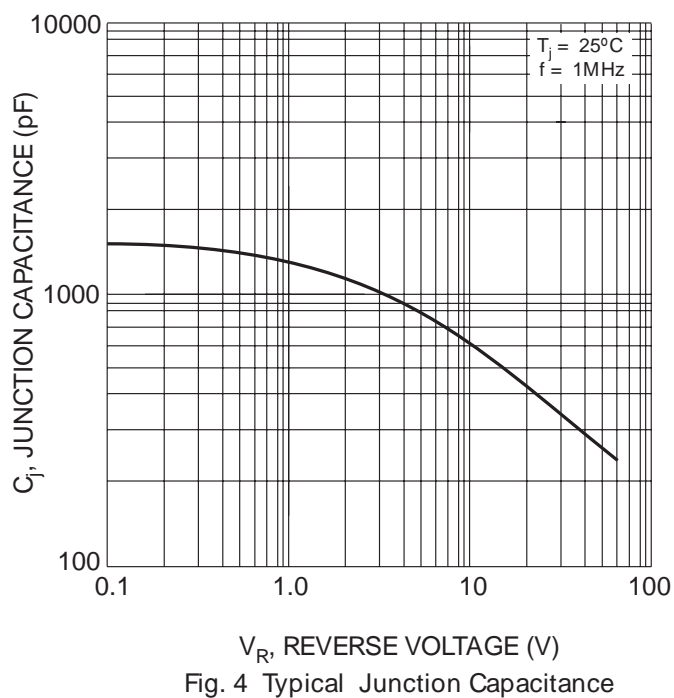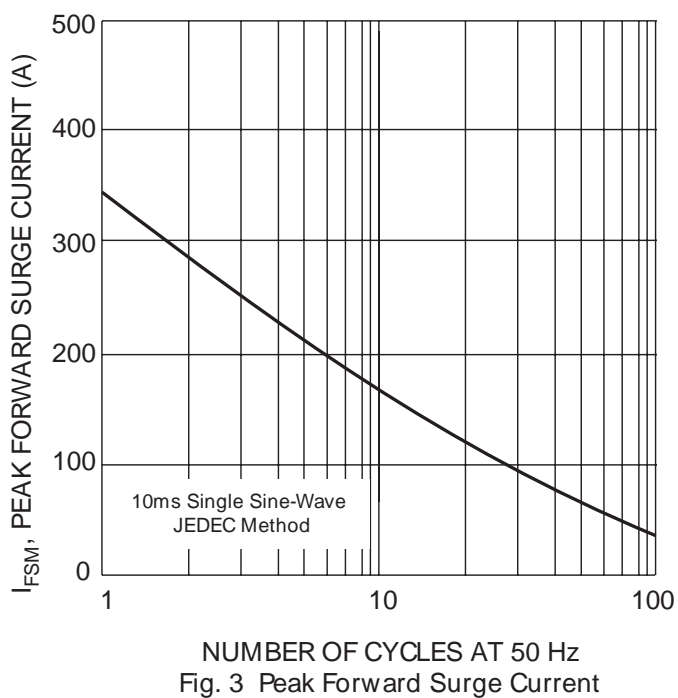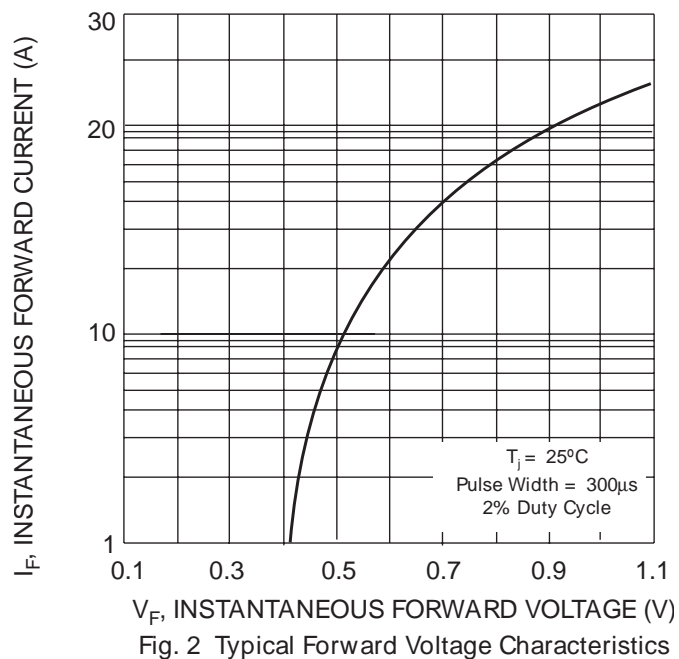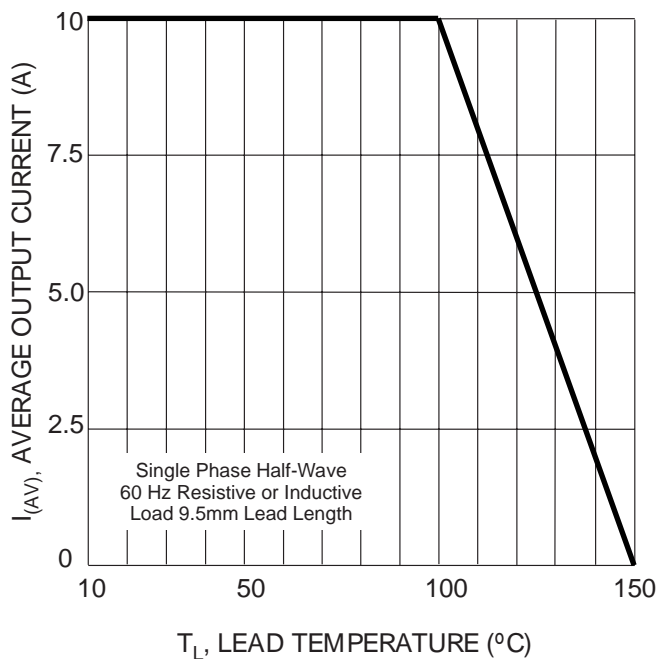


## MARKING INFORMATION

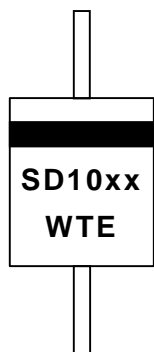


Cathode = Polarity Band  
 SD10xx = Device Number  
 xx = 30, 35, 40 or 45  
 WTE = Manufacturer's Logo

## TAPING SPECIFICATIONS

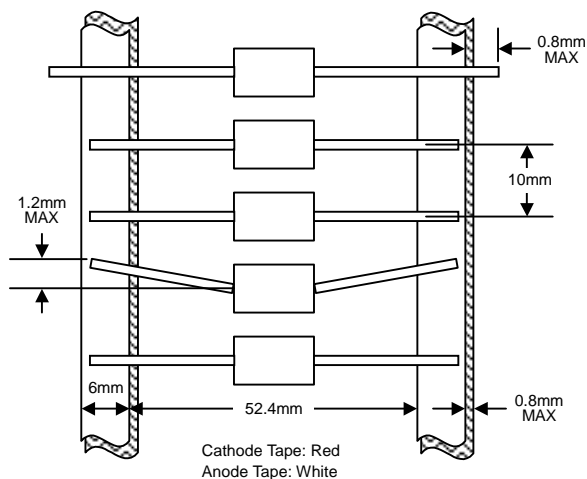


## PACKAGING INFORMATION


### TAPE & REEL

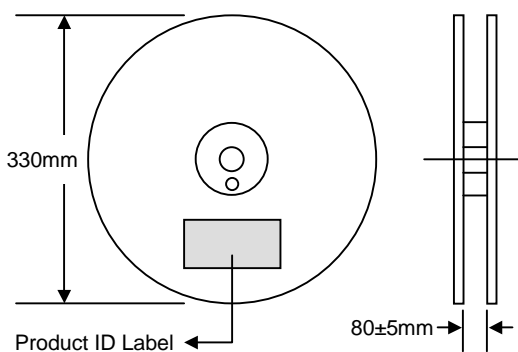

### TAPE & BOX

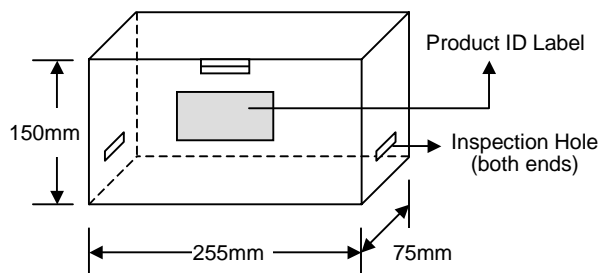

### BULK

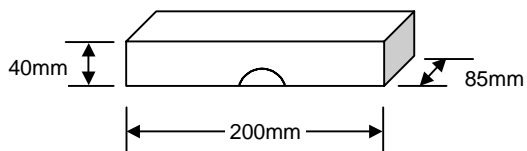

Packaging	Reel Diameter / Box Size (mm)	Quantity (PCS)	Carton Size (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
<b>TAPE &amp; REEL</b>	330	1,200	370 x 370 x 420	6,000	10.0
<b>TAPE &amp; BOX</b>	255 x 75 x 150	1,200	400 x 273 x 415	12,000	17.0
<b>BULK</b>	200 x 85 x 40	500	459 x 214 x 256	12,500	16.0

**Note:** 1. Paper reel, white or gray color. Core material: plastic or metal.  
 2. Components are packed in accordance with EIA standard RS-296-E.

## ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
SD1030-T3	DO-201AD	1200/Tape & Reel
<b>SD1030-TB</b>	DO-201AD	1200/Tape & Box
SD1030	DO-201AD	500 Units/Box
SD1035-T3	DO-201AD	1200/Tape & Reel
<b>SD1035-TB</b>	DO-201AD	1200/Tape & Box
SD1035	DO-201AD	500 Units/Box
SD1040-T3	DO-201AD	1200/Tape & Reel
<b>SD1040-TB</b>	DO-201AD	1200/Tape & Box
SD1040	DO-201AD	500 Units/Box
SD1045-T3	DO-201AD	1200/Tape & Reel
<b>SD1045-TB</b>	DO-201AD	1200/Tape & Box
SD1045	DO-201AD	500 Units/Box

1. Products listed in **bold** are WTE **Preferred** devices.
2. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
3. **To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, SD1030-TB-LF.**

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

**WARNING:** DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

### Won-Top Electronics Co., Ltd.

No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan

**Phone:** 886-7-822-5408 or 886-7-822-5410

**Fax:** 886-7-822-5417

**Email:** sales@wontop.com

**Internet:** <http://www.wontop.com>

*We power your everyday.*